

Touch & Close Zero - Adjustable magnetic door catcher with bolt



Description

Patented contactless door catcher with bolt. The power of the catching movement is adjustable and it is guaranteed independently from the gap between sash and frame. Touch & Close Zero is provided with a forend to cover the fastening screws (to be ordered separately) and a the central sprung bolt with a variable travel which can be operated by a proper active grip integrated in the Zero Handle kit.

Use


Only in combination with Zero Handle kit and a magnetic striker installed in the frame.

Adjustment

The strength of the catching movement is variable from 20 N to 40 N, according to the adjustment and the gap between sash and frame: turning the front grubs, the stroke of sliding magnetic components will be higher (up to 5 mm) and the force of attraction between sash and frame, too. For this reason, it is possible to guarantee the desired catching force even with variable gap. It is suggested to adjust Touch in order to avoid contact between the sliding components and the frame part. The inclination of the bolt and the striker tray facilitate the closing of the door.

Fastening

Touch & Close Zero fastening with 2 screws 3,5x20 mm.

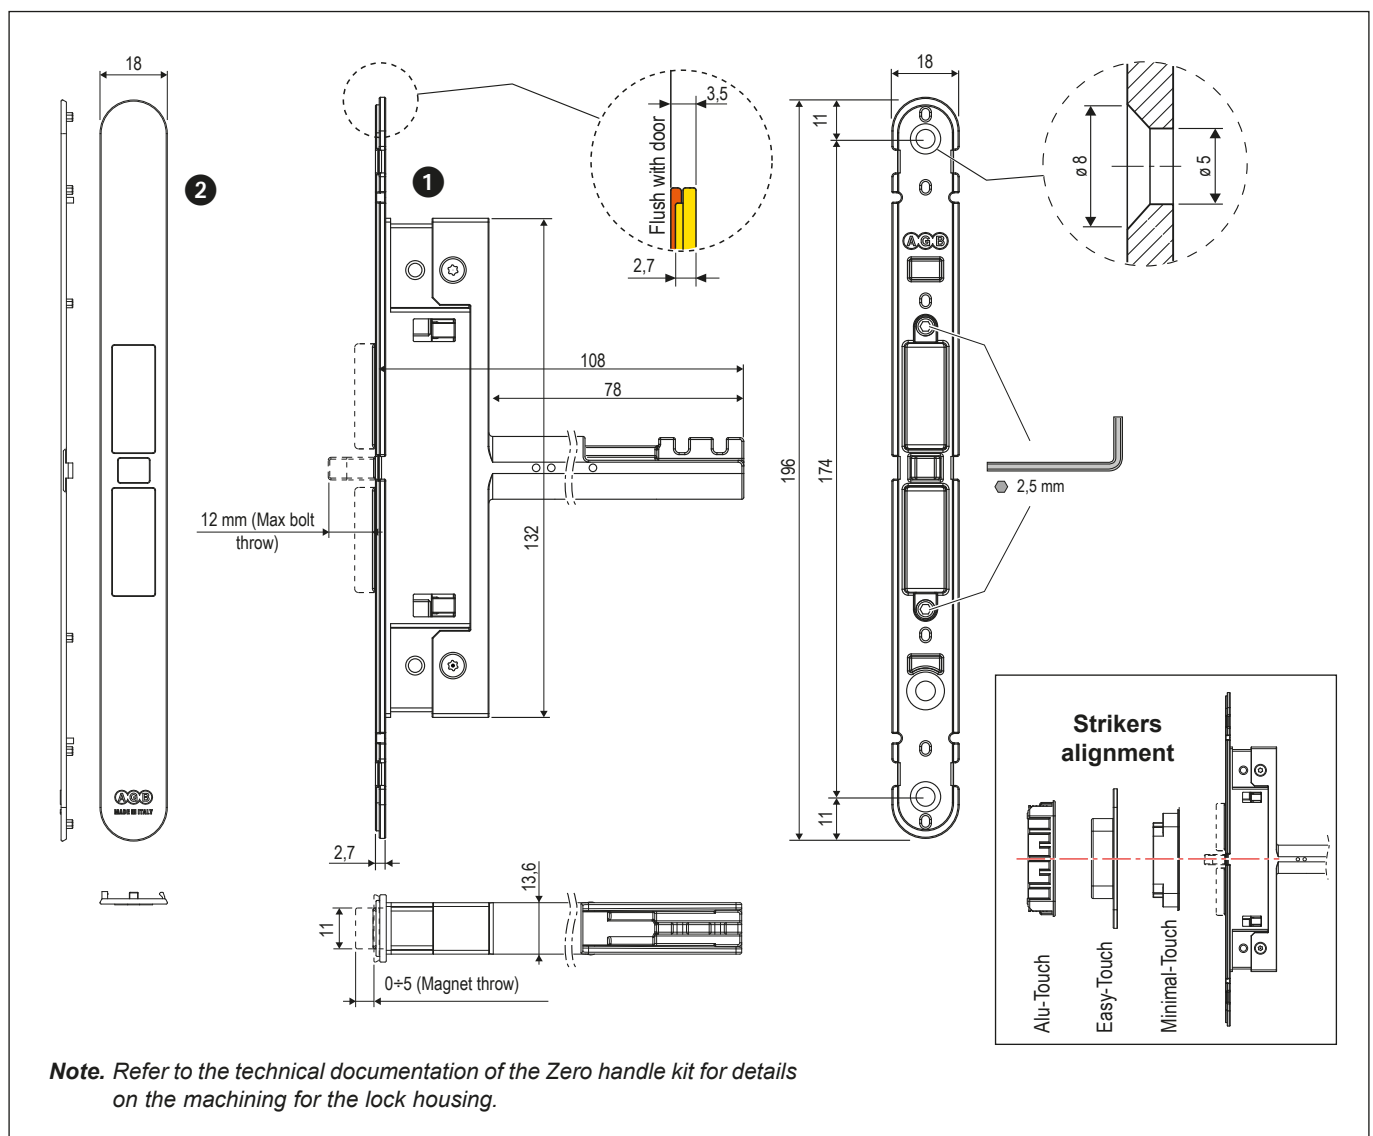

Order Specifications

Ref.	Article
1	B09602.90.XX
2	B01120.33.XX

Note. Refer to the current price list for availability of finishes.